


# Touch Screen Control Panel

T A C P - 1 0 0

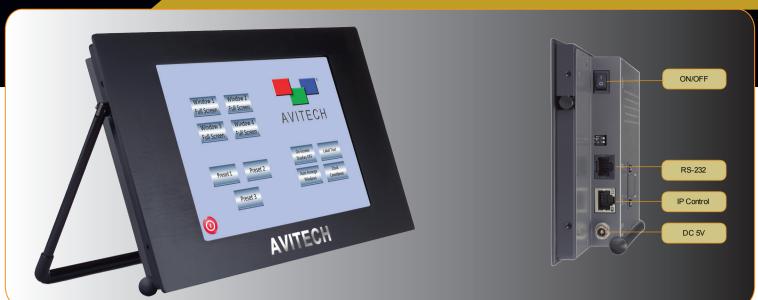

Avitech's Touch Screen Control Panel (TACP) is an ideal addition to your current multiviewer environment. Using touch-sensitive graphical buttons, users have the ability to control and

configure Avitech multiviewers in any array of custom

designed configurations.

### **One-Touch Convenience**

Using pre-defined or custom designed layouts, users can quickly access a variety of multiviewer functions with One-Touch Convenience. TACP's graphical user interface is simple, intuitive, and customizable for each users specific needs.

### **Avitech Software Control Panel (ACP)**

ACP is a compact and powerful software tool used to configure the TACP. Based on the Avitech Z-command coding script, it allows users to create custom action scripts and graphical button layouts.

### **Peer-to-Peer Communication**

Multiple TACP's can be configured together in a peer-to-peer environment. The number of modules the user can access will increase exponentially with the addition of multiple TACP's.

> www.avitechvideo.com sales@avitechvideo.com

Phone: 425.885.3863 Toll Free: 1.877. AVITECH Fax: 425.885.4726

**AVITECH INTERNATIONAL** 8655 154 Ave. NE Redmond, WA 98052-3561 USA

Avitech TACP

© Copyright 2010 Avitech International Corporation. All Rights Reserved -

Specifications Subject to Change Without Notice - Brochure Ver. TACP-F00020501

Add New Button Sort Pages

Save As ...

IP Table Editor

Write To TACP TACP Simulator



PRODUCT DATA SHEET

# **Touch Screen Control Panel**

T A C P - 1 0 0

# **Features**


- Compact form factor
- Touch sensitive screen with an intuitive GUI • One TACP can control up to 120 Avitech
- modules via IP and/or serial communication The TACP interface is configured using the
- flexible and intuitive ACP software utility
- TACP offers instant recall of module presets
- Peer-to-peer connectivity allows simultaneous
- use of up to 5 TACPs TACP is compatible with all Avitech multiviewers

	Specification	ons
I/O Ports	1 x RJ-45 (Static IP) 1 x RS-232	
PC System Requirements	Hard Disk Space: 256 MB PC OS: Windows XP, Vista RAM: 256 MB	
Viewing Angle	Vertical:+50" (Up from Center) and, -70" (Down from Center)	
	MCC-8004, VCC-8000, Rainier, and MCC-8001U series	
Multiviewer Compatibility	Up to 8 Groups of 15 modules, 120 multiviewer modules total	
	Peer-to-peer connection Up to 5 TACPs or up to 600 multiviewer modules total	
Screen Properties	Size (Diagonal): 7.0 inches wide Brightness: White, 360 cd/m2 Display Colors: 256k colors Screen Type: LCD TFT Active Matrix Resolution: 800 x 480 pixels Use Fingertip or Stylus Pen	
Power	100~240 V, 50/60Hz (External) 5V DC, 3.0A	
Housing	Metal	
Dimensions (W/H/D)	236.2 x 127.15 x 34.1 mm / 9.3 x 5.1 x 1.3 inches	
Weight	1 Kg / 2.2 lbs	
Environment	Temperature	Operating: 0°C (32°F) to 40°C (104°F) Storage: -10°C (-4°F) to 50°C (122°F)
	Humidity	0 % to 80 % relative, non-condensing

## Accessories

© Copyright 2010 Avitech International Corporation. All Rights Reserved -

- 5V DC Adaptor (Included)
- Printed Quick Start Guide (Included)
- RJ-45 to RS-232 cable (Optional)
- Rack mount kit (Optional)

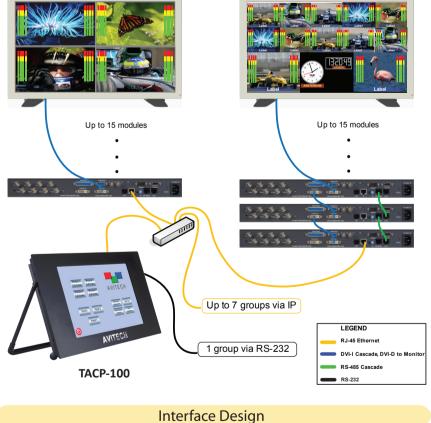

- Create unique layouts for up to three operators • Up to 64 graphic buttons in one screen
- Up to 80 commands in one button
- Create custom designed buttons and backgrounds or use pre-defined layouts

